

10 SEGMENT BAR GRAPH ARRAY

DC-10EWA

HIGH EFFICIENCY RED


Features

- •SUITABLE FOR LEVEL INDICATORS.
- •LOW CURRENT OPERATION.
- •EXCELLENT ON/OFF CONTRAST.
- •WIDE VIEWING ANGLE.
- ●END STACKABLE.
- •MECHANICALLY RUGGED.
- •BI-COLOR VERSION AVAILABLE.
- •STANDARD: GRAY FACE, WHITE SEGMENT.
- ●RoHS COMPLIANT.

Description

The High Efficiency Red source color devices are made With Gallium Arsenide Phosphide on Gallium Phosphide Orange Light Emitting Diode.

Package Dimensions & Internal Circuit Diagram

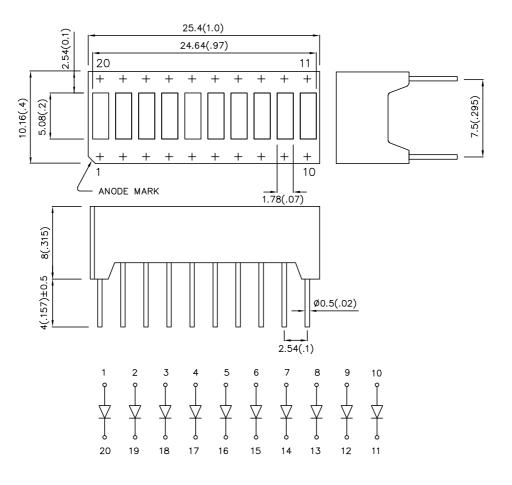

Notes

- 1. All dimensions are in millimeters (inches), Tolerance is $\pm 0.25(0.01")$ unless otherwise noted.
- 2. Specifications are subject to change without notice.

SPEC NO:DSAB7196 APPROVED: J. Lu REV NO:V.5 CHECKED: Joe Lee DATE: MAR/21/2005 DRAWN: W.J.ZHU PAGE: 1 OF 3

Kingbright

Selection Guide

Part No.	Dice	ce Lens Type		ıcd) 0mA	Description
			Min.	Тур.	
DC-10EWA	HIGH EFFICIENCY RED (GaAsP/GaP)	WHITE DIFFUSED	1900	9000	10 Segments Bargraph-Display

Electrical / Optical Characteristics at Ta=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	High Efficiency Red	627		nm	IF=20mA
λD	Dominant Wavelength	High Efficiency Red	625		nm	IF=20mA
Δλ1/2	Spectral Line Half-width	High Efficiency Red	45		nm	IF=20mA
С	Capacitance	High Efficiency Red	15		pF	VF=0V;f=1MHz
VF	Forward Voltage	High Efficiency Red	2.0	2.5	V	IF=20mA
IR	Reverse Current	High Efficiency Red		10	uA	VR = 5V

Absolute Maximum Ratings at TA=25°C

Parameter	High Efficiency Red	Units			
Power dissipation	105	mW			
DC Forward Current	30	mA			
Peak Forward Current [1]	160	mA			
Reverse Voltage	5	V			
Operating / storage Temperature	-40°C To +85°C				
Lead Solder Temperature [2]	260°C For 5 Seconds				


Notes:

1. 1/10 Duty Cycle, 0.1ms Pulse Width.

2. 5mm below package base.


SPEC NO:DSAB7196 REV NO:V.5 DATE: MAR/21/2005 PAGE: 2 OF 3
APPROVED: J. Lu CHECKED: Joe Lee DRAWN: W.J.ZHU


Kingbright

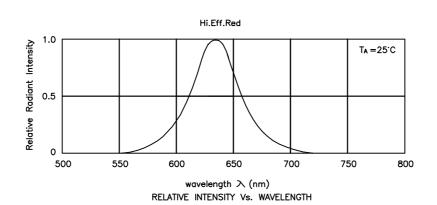



High Efficiency Red

DC-10EWA









Remarks:

If special sorting is required (e.g. binning based on forward voltage, luminous intensity, or wavelength), the typical accuracy of the sorting process is as follows:

- 1. Wavelength: +/-1nm
- 2. Luminous Intensity: +/-15%
- 3. Forward Voltage: +/-0.1V

Note: Accuracy may depend on the sorting parameters.

SPEC NO:DSAB7196 **REV NO:V.5 DATE: MAR/21/2005** PAGE: 3 OF 3 **CHECKED:** Joe Lee DRAWN: W.J.ZHU

APPROVED: J. Lu